

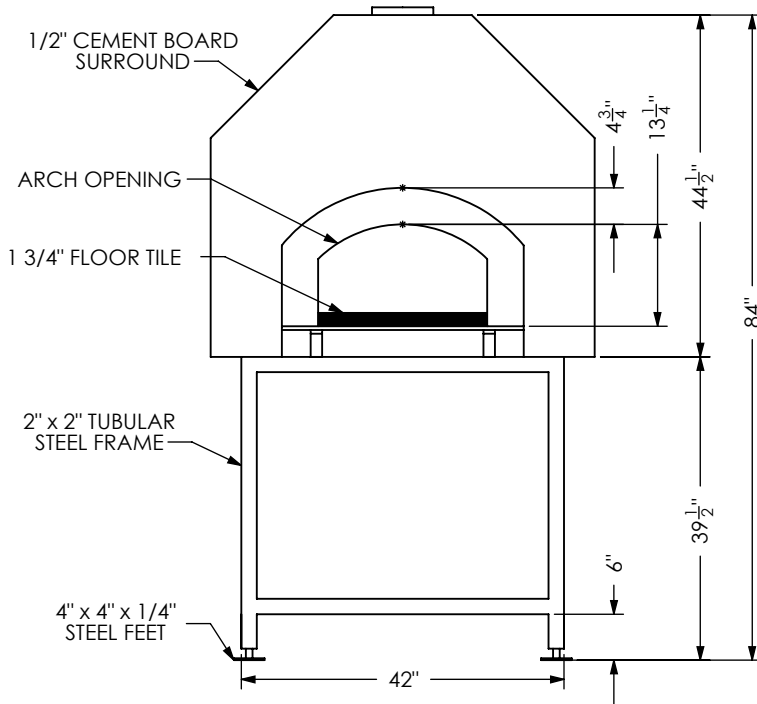


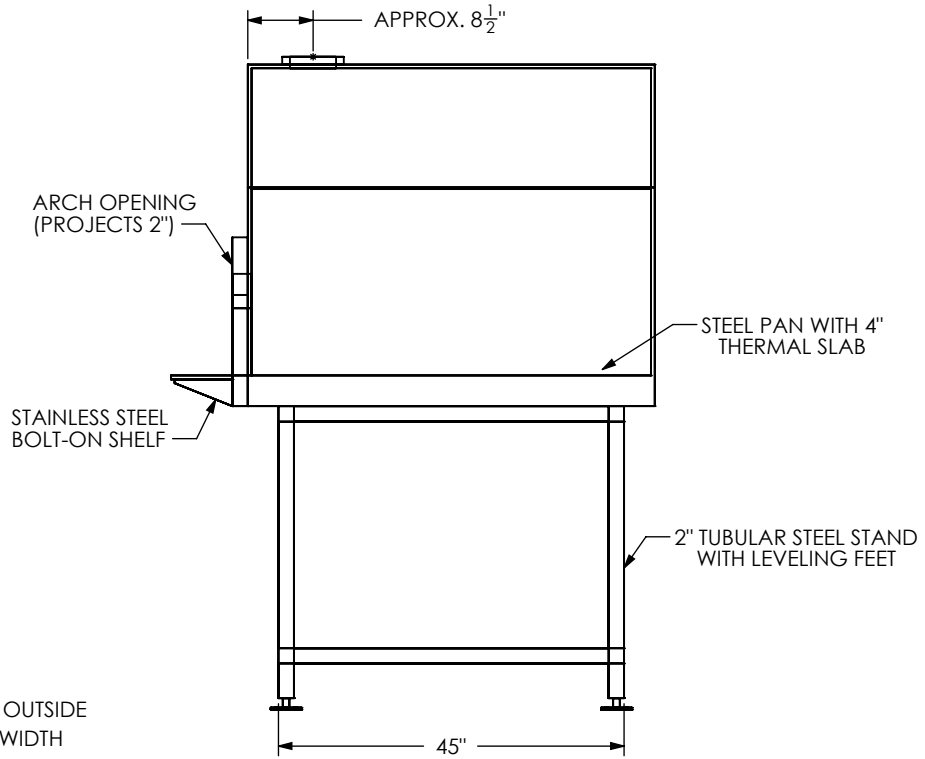

MEDIO 100
FORNO AL FRESCO
GABLE ENCLOSURE

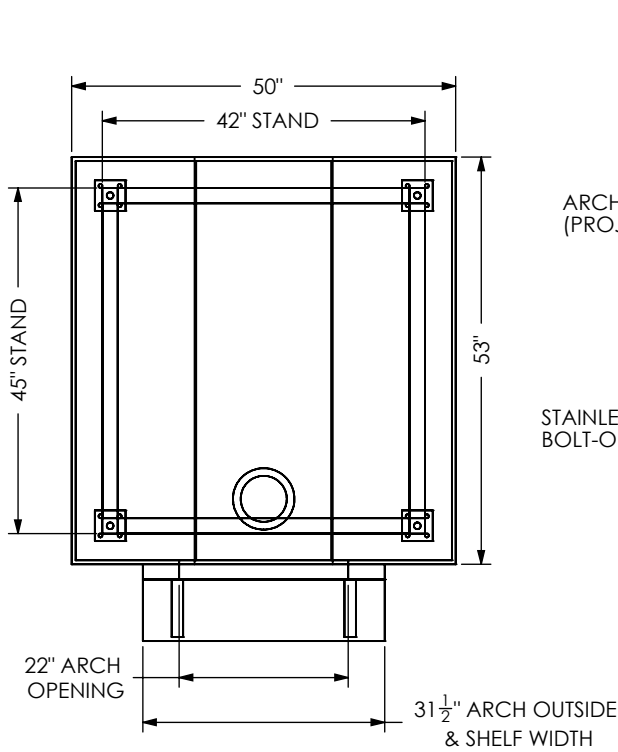

NOTES:

CLEARANCES

The oven shall be installed a minimum of 2" away from combustilbe material from back wall to oven and side wall to oven. You may bridge the gap between any wood framing and the oven by using metal framing with concrete board or masonry.

WEIGHT

2660#

VENTING

The oven is direct vented with a 6" chimney pipe listed to the UL 103 HT standard. The chimney starts with an anchor plate and requires a minimum rise of 36" for the oven to properly draft. The Chimney must terminate to a UL listed spark arrester installed 2" taller than any structure within a 10' radius.

UTILITIES

No electricity or gas required.

LISTINGS

Mugnaini Wood-fired Ovens have been tested and comply with the UL-737 safety standard.

Progressive changes in technology and product development may neccesitate changes to specifications without notice.

DRAWINGS NOT TO SCALE

