



ITALY'S ORIGINAL PIZZA OVEN

FACTORY ASSEMBLED

MODEL: MEDIO 100PA  
HIP ROOF ENCLOSURE

RESIDENTIAL WOOD FIRED OVEN

**CLEARANCES:**

The oven shall be installed a minimum of 2" away from combustible material from back wall to oven and side wall to oven. You may bridge the gap between any wood framing and the oven by using metal framing with concrete board or masonry.

**VENTING:**

The oven is direct vented with a 6" chimney pipe listed to the UL 103 HT standard. The chimney starts with an anchor plate and requires a minimum rise of 36" for the oven to properly draft. The Chimney must terminate to a UL listed spark arrestor installed 2' taller than any structure within a 10' radius.

**SHELF:**

Stainless steel shelf bolts to oven. Shelf to be covered with non-combustible material provided by installer.

**FLOOR HEIGHT: 45"**

**WEIGHT: 2100 lb.**


**UTILITIES:**

No electricity or gas required.


**NOTE:**

The oven should be installed in accordance with all relevant local and national codes and in a manner acceptable to the authority having jurisdiction.


Progressive changes in technology and product development may necessitate changes to specifications without notice.

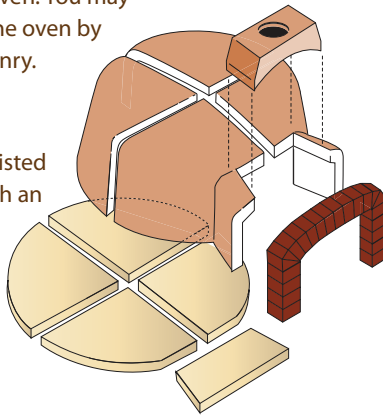


OVEN COMPONENTS

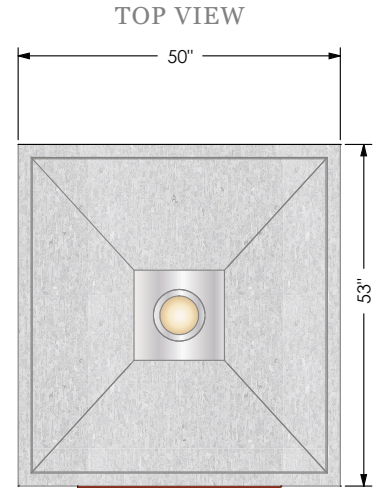

22" ARCH OPENING  
31 1/2" ARCH OUTSIDE & SHELF WIDTH

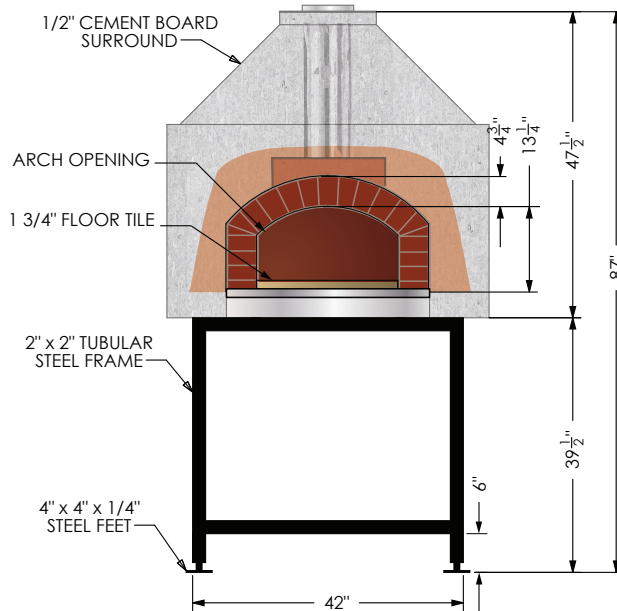

FRONT VIEW

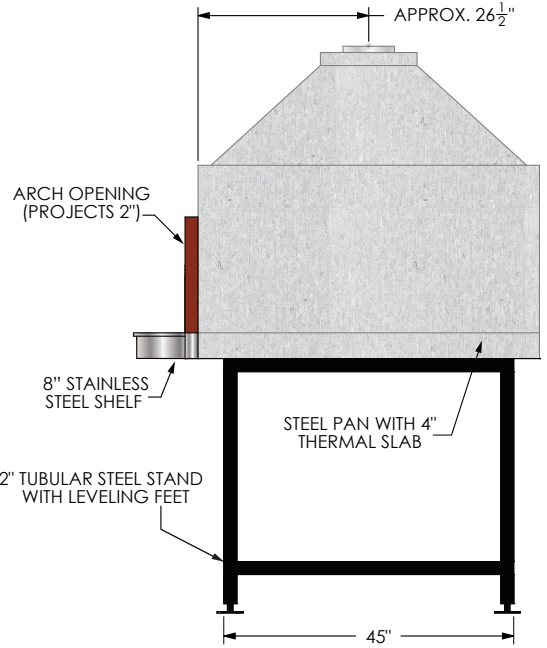

SIDE VIEW



© COPYRIGHT 2011, Mugnaini Imports, Inc.  
May not be used without permission of copyright holder.



**Mugnaini Imports, Inc.**

**11 Hangar Way, Watsonville CA 95076**

**888.887.7206 | 831.761.1767 | Fax: 831.728.5570**

**www.mugnaini.com | mugnaini@mugnaini.com**