



ITALY'S ORIGINAL PIZZA OVEN

FACTORY ASSEMBLED

MODEL: MEDIO 110PA
HIP ROOF ENCLOSURE


RESIDENTIAL WOOD FIRED OVEN

CLEARANCES:

The oven shall be installed a minimum of 2" away from combustible material from back wall to oven and side wall to oven. You may bridge the gap between any wood framing and the oven by using metal framing with concrete board or masonry.

VENTING:

The oven is direct vented with a 6" chimney pipe listed to the UL 103 HT standard. The chimney starts with an anchor plate and requires a minimum rise of 36" for the oven to properly draft. The Chimney must terminate to a UL listed spark arrestor installed 2' taller than any structure within a 10' radius.

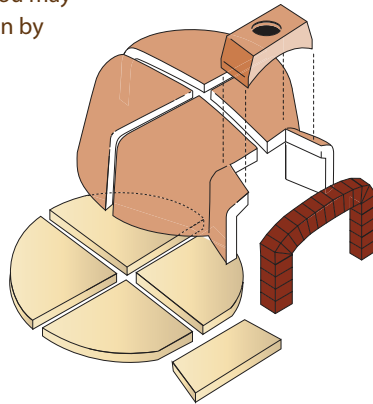

OVEN COMPONENTS

SHELF:

Stainless steel shelf bolts to oven. Shelf to be covered with non-combustible material provided by installer.

UTILITIES:

No electricity or gas required.

FLOOR HEIGHT: 45"

WEIGHT: 2300 lb.

NOTE:



The oven should be installed in accordance with all relevant local and national codes and in a manner acceptable to the authority having jurisdiction.

Progressive changes in technology and product development may necessitate changes to specifications without notice.




© COPYRIGHT 2011
Mugnaini Imports, Inc.
May not be used without permission of copyright holder.

TOP VIEW

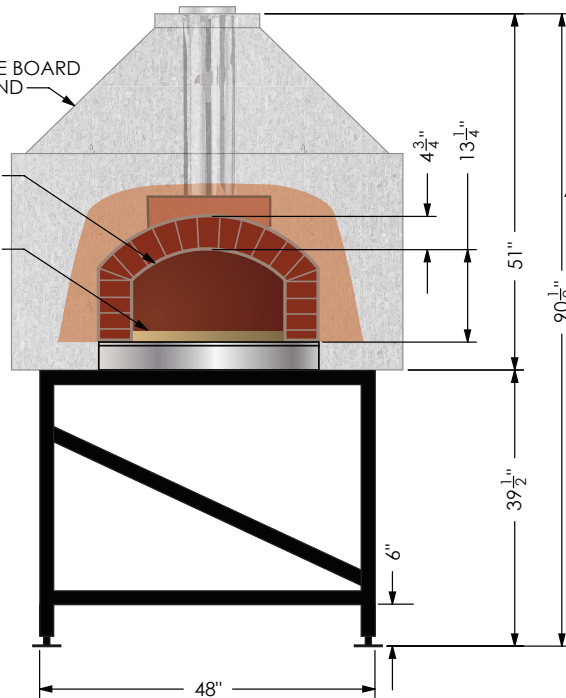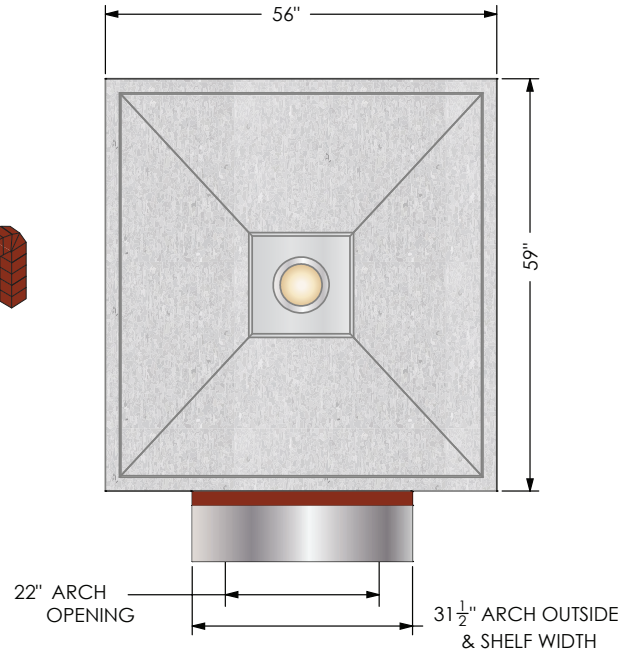

FRONT VIEW

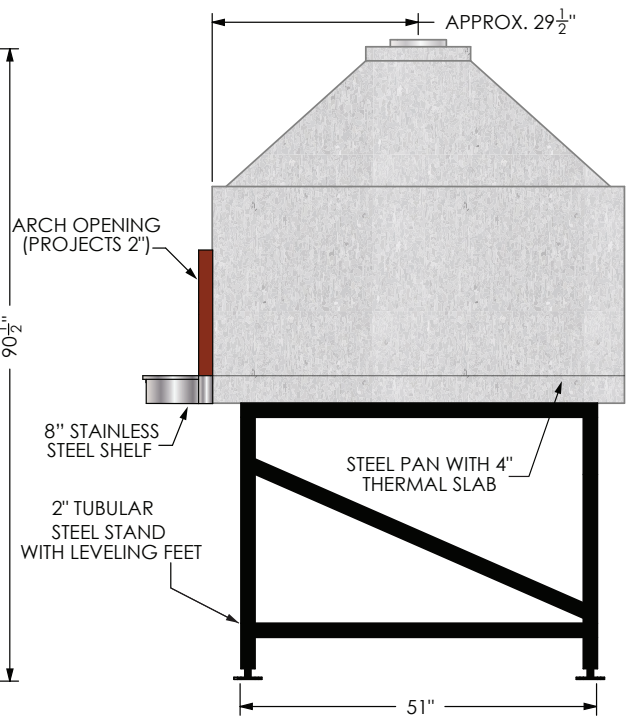

SIDE VIEW



Mugnaini Imports, Inc.

11 Hangar Way, Watsonville CA 95076

888.887.7206 | 831.761.1767 | Fax: 831.728.5570

www.mugnaini.com | mugnaini@mugnaini.com